


RM-612 12 Zone Remote Paging Mic

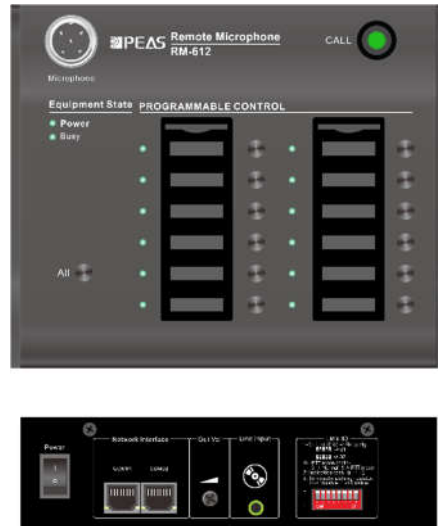

Features

- Partition/grouping selection in a key. It is easy to operate and it is intuitive and clear;
- Key mode and PTT mode for paging can be configured;
- Paging priority can be configured;
- Support 24V phantom power supply. It is not necessary to provide the external power supply adapter.
- Use the balanced transmission to extend the transmission distance $\leq 600\text{m}$;
- Support the redundant cabling of the line.

Specification

| | | |
|-------------------------------|---|----------------------------|
| Model | RM-612 | |
| Description | Remote Paging Microphone | |
| System Capacity | 32 units | |
| Communication Distance | 600 meters | |
| System Connection | Star connection or loop redundancy connection | |
| Zone Number | 12 zones or 12 groups | |
| Paging Mode | PPT & normal paging modes | |
| Electrical Part | Phantom Power Voltage | 20V-27.5V |
| | Max Current | <0.1A |
| | Power Consumption | <2.4W |
| Line Input | Sensitivity | 775mV |
| | Impedance | 10kΩ |
| | S/N Ratio | >70dB |
| Microphone Input | Sensitivity | 5mV |
| | Impedance | 600Ω |
| Working Environment | Operation Temp | +5℃ ~ +40℃ |
| | Storage Temp | -20℃ ~ +70℃ |
| | Relative Humidity | < 95% |
| Mechanical Part | Dimension | 240(W) x 140(D) x 55(H) mm |
| | Weight | 1kg |
| | Finish | Aluminum case in black |