

HORN SPEAKER


HS731 SPECIFICATIONS








General Specification	
Туре	HS731
Frequency Response	350-8KHz
Sensitivity	108dB
Power Handling	30W
Power Taps	3.8W/7.5W/15W/30W/8Ω
Line input	100V/70V
Dimension(mm)	Ф246*292
Physical Specification	
Material	ABS
Finished Colour	Gray(RAL7035)
Unit Weight	2.4Kg
Gross Weight	13KG/4PCS
Packing Dimension	58*57*34cm



























Guangzhou Q&S Audio Co., Ltd WWW.PEAS-PA.COM

Installation


Horn speaker

Installation size

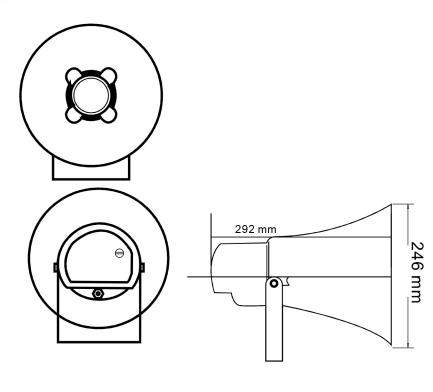

Installation steps

1. Firstly, it is suitable for 3 mounting holes for Φ 10mm screws on the wall. The distance between the hole and the hole is Φ 40mm

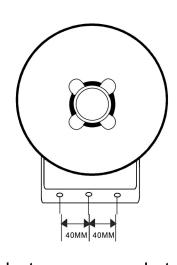

2. The hole in the product bracket corresponds to the hole in the wall and is locked Φ 10mm screw, fix the product on the wall, and adjustGood angle

